

# UBF RA120 Series (120V)

## Electrical Characteristics

Part No Figure / Lead Option	$I_{hold}$ (A)	$I_{trip}$ (A)	$V_{max}$ (V)	$I_{max}$ (A)	$P_{d\ type}$ (W)	Max. (A)	Time-to-trip (s)	$R_{min}$ ( $\Omega$ )	$R_{1max}$ ( $\Omega$ )
UBF RA120010 Fig. 1, $\emptyset$ 0.51, Sn/CuFe	0.10	0.20	120	2.0	0.84	0.50	10.0	3.00	7.50
UBF RA120017 Fig. 1, $\emptyset$ 0.51, Sn/CuFe	0.17	0.34	120	2.0	0.84	0.80	10.0	2.00	7.00
UBF RA120020 Fig. 1, $\emptyset$ 0.51, Sn/CuFe	0.20	0.40	120	2.0	1.08	1.00	9.0	1.83	4.40
UBF RA120025 Fig. 1, $\emptyset$ 0.51, Sn/CuFe	0.25	0.50	120	3.0	1.08	1.25	7.5	1.25	3.00
UBF RA120030 Fig. 1, $\emptyset$ 0.51, Sn/CuFe	0.30	0.60	120	3.0	1.44	1.50	8.5	0.88	2.10
UBF RA120040 Fig. 1, $\emptyset$ 0.51, Sn/CuFe	0.40	0.80	120	3.0	1.44	2.00	6.5	0.55	1.29
UBF RA120050 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	0.50	1.00	120	3.0	1.56	2.25	6.0	0.50	1.17
UBF RA120065 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	0.65	1.30	120	5.0	1.68	3.25	5.7	0.31	0.72
UBF RA120070 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	0.70	1.50	120	5.0	1.80	3.75	6.3	0.25	0.60
UBF RA120075 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	0.75	1.50	120	7.5	2.64	3.75	15.0	0.25	0.69
UBF RA120090 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	0.90	1.80	120	5.0	1.80	4.50	7.2	0.20	0.47
UBF RA120100 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	1.00	2.00	120	10.0	2.64	5.00	15.0	0.18	0.47
UBF RA120110 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	1.10	2.20	120	8.0	2.28	5.50	8.2	0.15	0.38
UBF RA120125 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	1.25	2.50	120	12.5	2.88	6.25	20.0	0.11	0.33
UBF RA120130 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	1.35	2.70	120	10.0	2.24	6.75	9.6	0.12	0.30
UBF RA120135 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	1.35	2.70	120	13.5	3.12	6.75	20.0	0.11	0.30
UBF RA120160 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	1.60	3.20	120	12.0	3.12	8.00	11.4	0.09	0.22
UBF RA120180 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	1.80	3.70	120	12.0	3.36	9.25	12.6	0.08	0.19
UBF RA120200 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	2.00	4.20	120	20.0	4.32	10.00	36.0	0.08	0.21
UBF RA120250 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	2.50	5.00	120	15.0	4.44	10.25	15.6	0.05	0.13
UBF RA120300 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	3.00	6.00	120	17.0	4.56	15.00	19.8	0.04	0.10
UBF RA120375 Fig. 2, $\emptyset$ 0.81, Sn/CuFe	3.75	7.50	120	20.0	4.80	18.75	24.0	0.03	0.08

$I_{hold}$ : Hold current is the maximum current that **UBF Fuse** can pass through without interruption at 20°C unless otherwise specified.

$I_{trip}$ : Trip current is the minimum current that will switch the device from low resistance state to high resistance state at 20°C unless specified.

$V_{max}$ : The maximum voltage device can withstand without damage at rated current.

$I_{max}$ : The maximum current device can withstand without damage at rated voltage.

$P_d$ : The power dissipated from device when in the tripped state at 20°C unless otherwise specified.

$R_{min}$ : The minimum resistance of device as received from the factory at 20°C unless otherwise specified.

$R_{max}$ : The maximum resistance of device as received from the factory at 20°C unless otherwise specified.

$R_{1max}$ : The maximum resistance of device when measured one hour post trip at 20°C unless otherwise specified.

Max. Time-to-trip: The maximum time for device to trip at specified current ratings at 20°C unless otherwise specified.



## Environmental Characteristics

Test	Test Conditions	Resistance Change
Passive Aging	+85°C, 1000 hours	±5% typical resistance change
Humidity Aging	+85°C, 85% R.H., 7 days	±5% typical resistance change
Thermal Shock	+85°C to -40°C, 10 times MIL-STD-202, Method 107G	±5% typical resistance change
Vibration	MIL-STD-883C, Condition A	No change
Solvent resistance	MIL-STD-202, Method 215	No change

# UBF RA120 Series (120V)

## Dimensions

		A	B	C	D	E	F
Part No	Figure	Max.	Max.	Typical	Min.	Max.	Typical
UBF RA120010	1	7.9	13.0	5.1	7.6	5.0	3.0
UBF RA120017	1	7.9	13.0	5.1	7.6	5.0	3.0
UBF RA120020	1	7.9	13.0	5.1	7.6	5.0	3.0
UBF RA120025	1	7.9	13.0	5.1	7.6	5.0	3.0
UBF RA120030	1	7.9	13.0	5.1	7.6	5.0	3.0
UBF RA120040	1	8.2	14.2	5.1	7.6	3.8	3.0
UBF RA120050	1	9.2	14.9	5.1	7.6	5.0	3.0
UBF RA120065	1	9.7	14.9	5.1	7.6	5.0	3.0
UBF RA120070	1	10.6	15.5	5.1	7.6	5.0	3.0
UBF RA120075	1	10.9	17.0	5.1	7.6	5.0	3.0
UBF RA120090	1	11.9	15.9	5.1	7.6	5.0	3.0
UBF RA120100	2	11.5	20.1	5.1	7.6	5.0	3.0
UBF RA120110	2	13.3	18.3	5.1	7.6	5.0	3.0
UBF RA120125	2	14.0	21.7	5.1	7.6	5.0	3.0
UBF RA120130	2	15.5	20.6	5.1	7.6	5.0	3.0
UBF RA120135	2	16.3	21.7	5.1	7.6	5.0	3.0
UBF RA120160	2	17.5	22.5	5.1	7.6	5.0	3.0
UBF RA120185	2	19.9	24.9	5.1	7.6	5.0	3.0
UBF RA120200	2	23.5	27.9	10.2	7.6	5.0	3.0
UBF RA120250	2	22.5	27.5	10.2	7.6	5.0	3.0
UBF RA120300	2	25.5	30.0	10.2	7.6	5.0	3.0
UBF RA120375	2	29.5	34.0	10.2	7.6	5.0	3.0

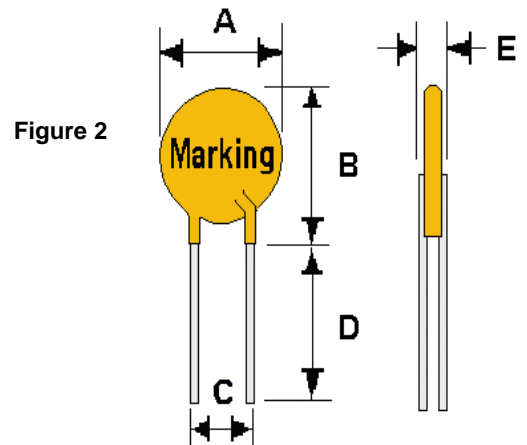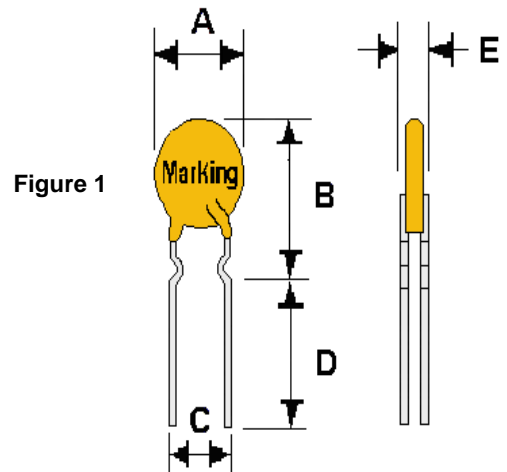

**NOTE:** All drawings are not in scale and layout may vary.

All parts dimension is in millimeter unless otherwise specified.

Radial-leaded parts are not designed for reflow soldering.

**Lead Materials:** UBFRA120010 – 90, Tin plated Copper Steel, 0.51mm / 0.205mm<sup>2</sup> / 24 AWG

UBFRA120100 – 375, Tin plated Copper, 0.81mm / 0.52mm<sup>2</sup> / 20 AWG

**Insulation Materials:** Cured, flame-retardant epoxy polymer that meets UL94V-0

**Agency Approval:** UL File Number E 119550


c-UL File Number E 119550

TUV File Number Pending

# UBF RA120 Series (120V)

Typical Thermal Derating Chart –  $I_{hold}$  (A)


Part No	-40	-20	0	20	40	60	85
UBF RA120010	0.16	0.14	0.12	0.10	0.08	0.06	0.04
UBF RA120017	0.27	0.23	0.20	0.27	0.14	0.10	0.06
UBF RA120020	0.32	0.28	0.24	0.20	0.16	0.12	0.08
UBF RA120025	0.40	0.35	0.30	0.25	0.20	0.15	0.10
UBF RA120030	0.47	0.41	0.36	0.30	0.24	0.18	0.11
UBF RA120040	0.63	0.55	0.48	0.40	0.32	0.24	0.15
UBF RA120050	0.79	0.69	0.60	0.50	0.40	0.30	0.19
UBF RA120065	1.03	0.90	0.77	0.65	0.52	0.39	0.25
UBF RA120070	1.19	1.04	0.89	0.75	0.68	0.53	0.29
UBF RA120075	1.19	1.24	0.89	0.75	0.68	0.53	0.29
UBF RA120090	1.42	1.24	1.07	0.90	0.81	0.63	0.34
UBF RA120100	1.58	1.38	1.19	1.00	0.90	0.70	0.38
UBF RA120110	1.74	1.52	1.13	1.10	0.99	0.77	0.42
UBF RA120125	1.98	1.73	1.49	1.25	1.13	0.88	0.48
UBF RA120130	2.13	1.86	1.61	1.44	1.22	0.95	0.51
UBF RA120135	2.13	1.86	1.61	1.67	1.22	0.952	0.51
UBF RA120160	2.53	2.21	1.90	1.60	1.44	1.12	0.06
UBF RA120185	2.92	2.55	2.20	1.85	1.67	1.30	0.701
UBF RA120200	3.16	2.76	2.38	2.00	1.80	1.40	0.76
UBF RA120250	3.95	3.45	2.98	2.50	2.25	1.75	0.95
UBF RA120300	4.74	4.14	3.57	3.00	2.70	2.10	1.14
UBF RA120375	5.93	11.70	4.46	3.75	3.38	2.63	1.43

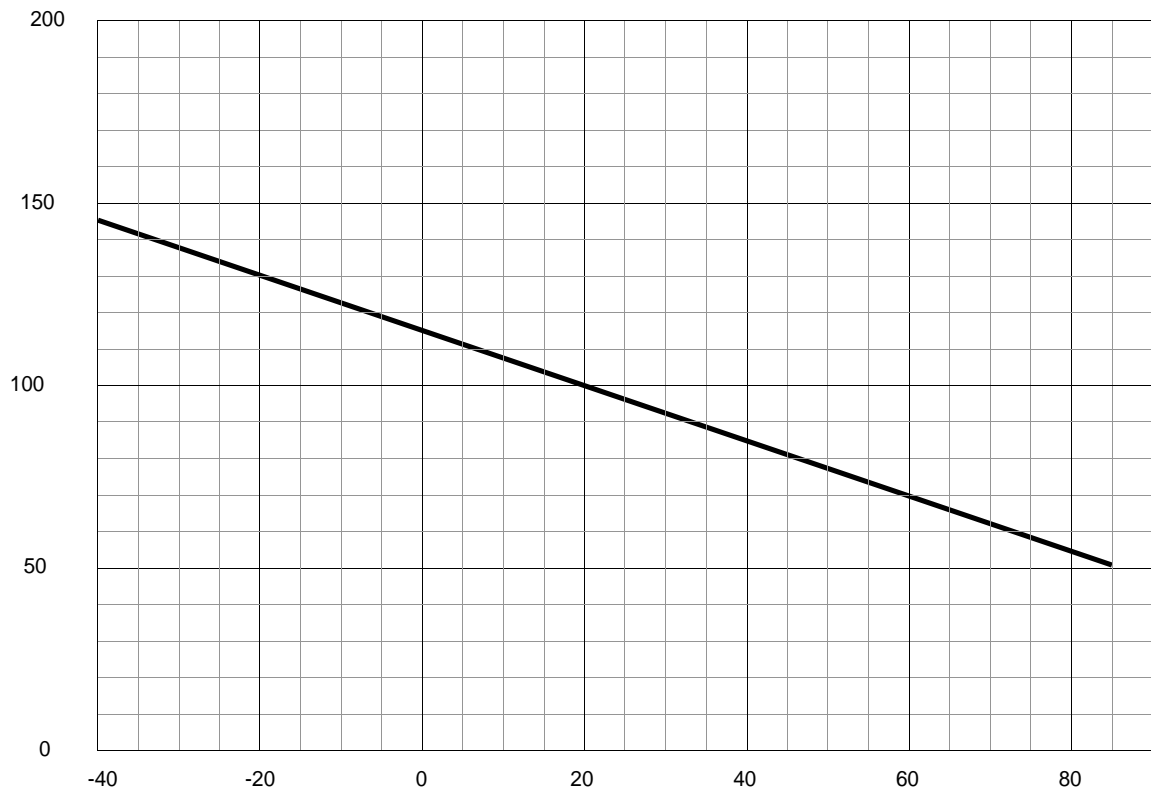


Ambient Operating Temperature (°C)

# UBF RA120 Series (120V)

## Typical Time To Trip Curve at 20°C

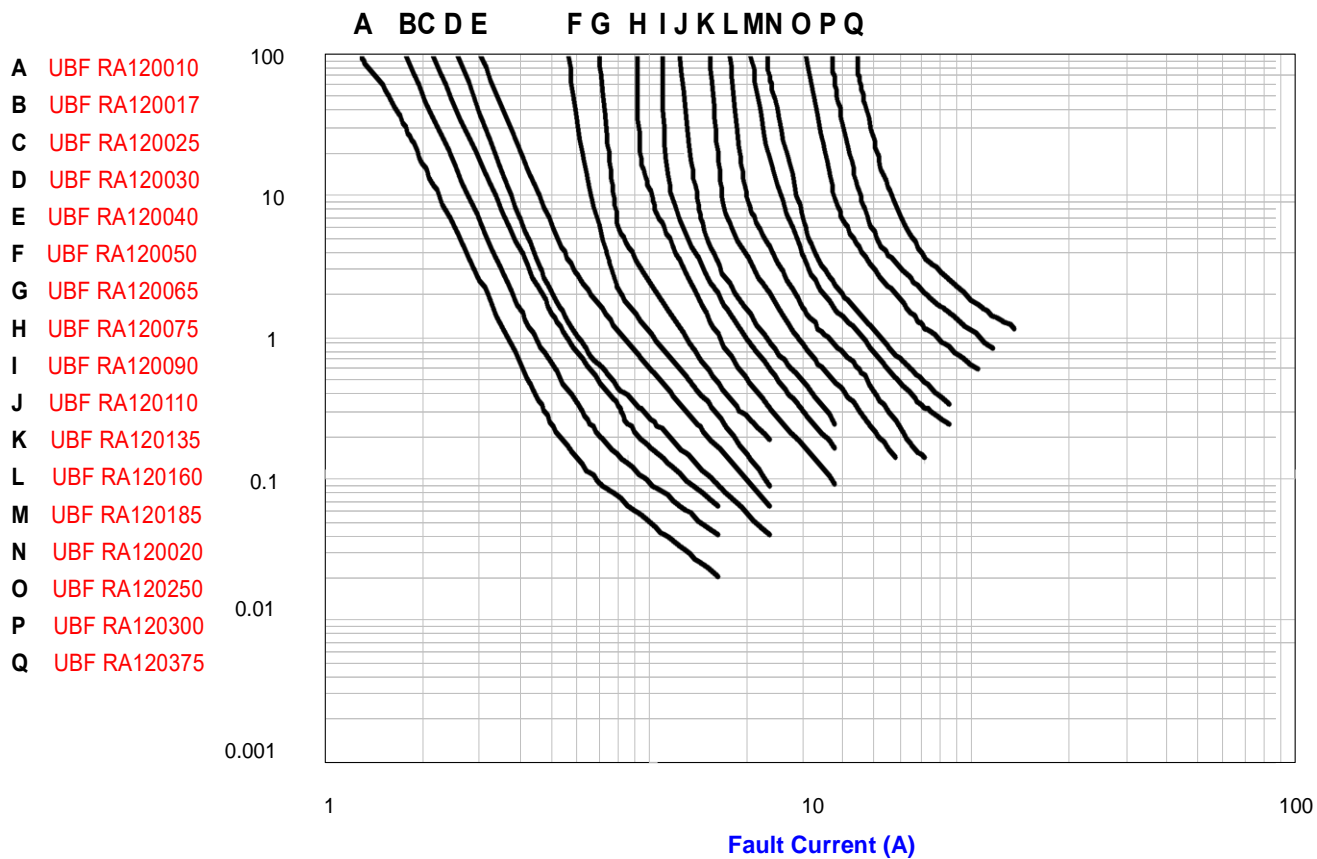

### Ordering Information

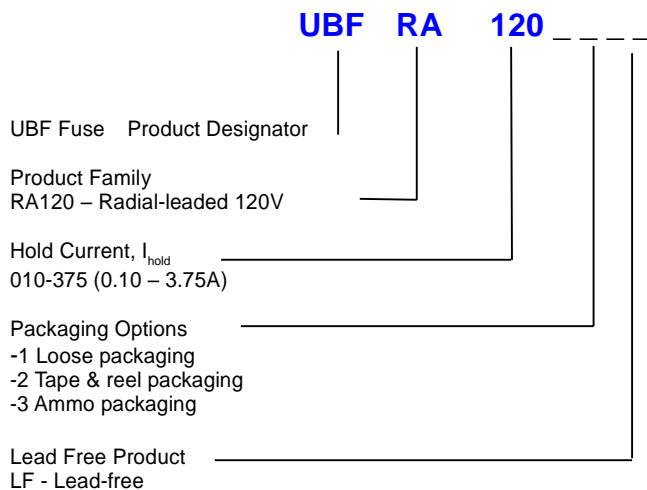

### Part Marking

