


UPM Series

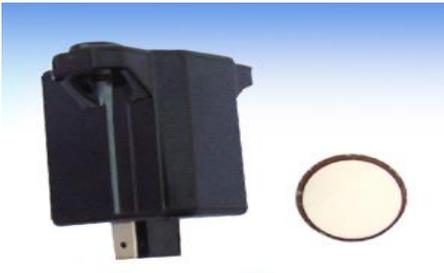

DESCRIPTION

Single-phase AC motor at the start line in tandem with the auxiliary winding to start the PTC thermistor can be automatically disconnected after the motor to accelerate in order to protect the coil from damage. can provide various forms of packaging shell.

FEATURES

- Good Impact Resistance, high voltage.
- long service life, a small residual current.
- low-power .
- good flame retardant performance.
- the use of safe and reliable.

APPLICATIONS

- Household appliances (refrigerators, air conditioning, etc.)
- Motor .
- Train heating.
- Dryer.

Order Map

UPM



-



Series Code
UPM
PTC thermistor

Res. value
at 25°C
47R= 47Ω
33R= 33Ω

Res. Tolerance
Exp:
M : 20%
N : 30%